


- Box in cast aluminium, painted black
- Protection class IP67
- Visual position indicator
- NAMUR connection according to VDI/VDE 3845




SBM351C




- 2 **mechanical** switches SPDT, **3-wire** type V3-900
- voltage: max. 240 VAC - 16 A
- temperature: -20°C ~ +80°C
- connection M20x 1,5 (2)

SB2351CP

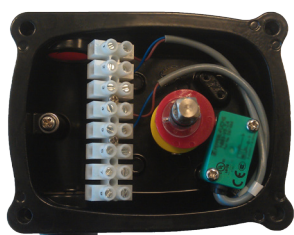


- 2 **inductive** switches, **2-wire** P&F type NBB3-V3-Z4
- voltage: 5-60 VDC
- temperature: -20°C ~ +80°C
- connection M20x 1,5 (2)

SB3351CP

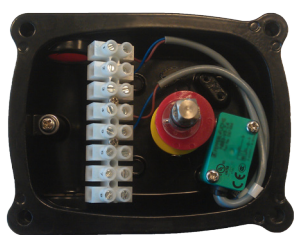

- 2 **inductive** switches, **3-wire** P&F type NBB2-V3-E2
- voltage: 10-30 VDC
- temperature: -20°C ~ +75°C
- connection M20x 1,5 (2)

SBI351C

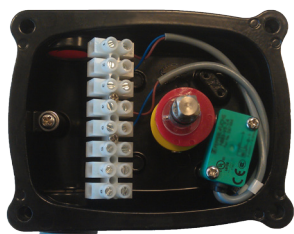


- 2 **inductive** switches, **2-wire** P&F type NCB2-V3-N0
- voltage: 8V, 1-3 mA
- temperature: -20°C ~ +80°C
- connection with blue cable gland M16x 1,5
- ATEX zone 1GD Ex ia


Sodeco configuration	Assembly	Actreg	EI-O-Matic	Air Torque
80H20	30 mm x 80 mm x H20 mm	-	E 25 - E 350	AT 50 - AT 300
80H30	30 mm x 80 mm x H30 mm	A 20 - A 850	-	AT 350 - AT 500
130H30	30 mm x 130 mm x H30 mm	A 1200 - A 4000	E 600 - E 4000	-



- Compact and stable
- Direct mounting
- Protection class IP67
- With position indicator type BT
- Connection with junction box: gland M20 and M12
- Connection without junction box: with connector V18W

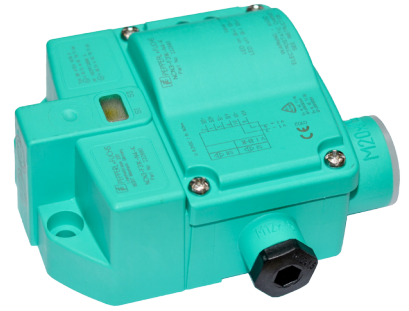

PEPPERL+FUCHS

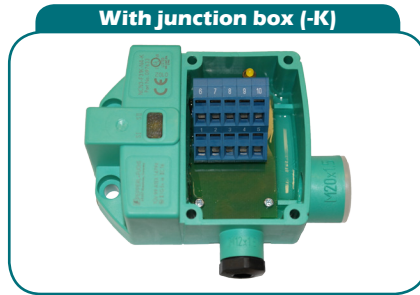

SD2 1XX

SD23XX

- 2 inductive switches P&F type NBN3-F31K-Z8
- voltage: 6-60V, 4-100 mA
- temperature: -25°C ~ +70°C

SD3 1XX




SD33XX

- 2 inductive switches P&F type NBN3-F31K-E8
- voltage: 10-30V, 0-100 mA
- temperature: -25°C ~ +70°C

SDI1X1

SDI3XX


- 2 inductive switches P&F type NBN3-F31K-N4
- voltage: 8V, 1-3 mA
- temperature: -25°C ~ +100°C
- ATEX II 1 G Ex ia IIC T6

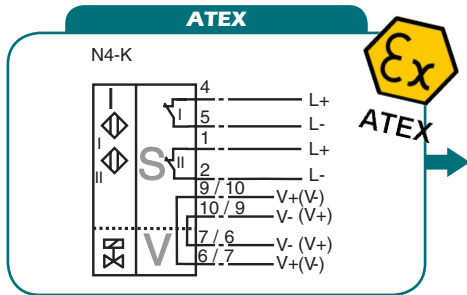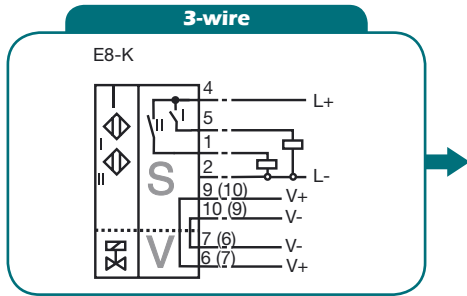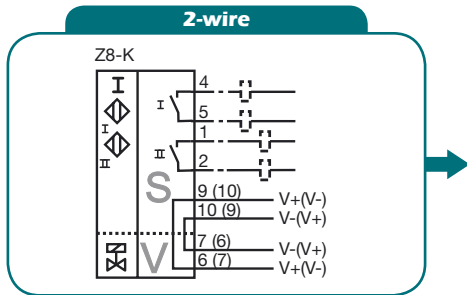


Sodeco configuration	Assembly	Actreg	EI-O-Matic	Air Torque
BT 001	30 mm x 80 mm x H30 mm	A 20 - A 850	E 25 - E 350	AT 50 - AT 500
BT 002	30 mm x 130 mm x H30 mm	A 1200 - A 4000	E 600 - E 4000	-




- Box in aluminium, epoxy coated
- Protection class IP67
- With position indicator 90°, green open / red closed
- Connection 2x wartel M20
- NAMUR according to VDI/VDE 3845

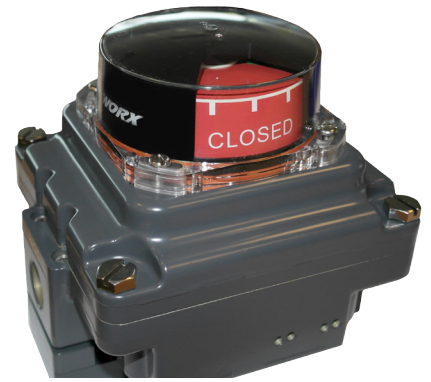

TOPWORX

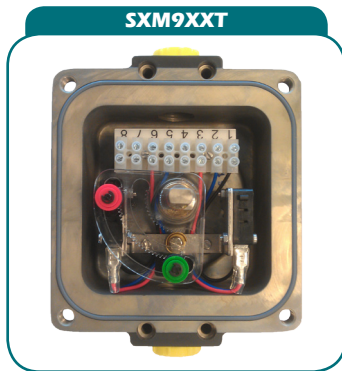

- 2 **mechanical** switches SPDT, **3-wire** type V3-900
- voltage: max. 240 VAC - 10 A
- temperature: -40°C ~ +80°C
- ATEX zone 2GD Ex d IIC

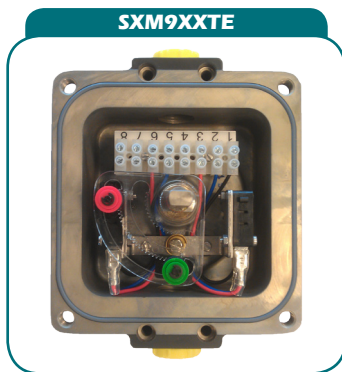

- 2 gold-plated, **mechanical** switches SPDT, **3-wire** type V3-900
- voltage: max. 120 VAC - 50 mA
- temperature: -40°C ~ +80°C
- ATEX zone 2GD Ex d IIC



- 4 gold-plated, **mechanical** switches SPDT, **3-wire** type V3-900
- voltage: max. 120 VAC - 50 mA
- temperature: -40°C ~ +80°C
- ATEX zone 2GD Ex d IIC

Sodeco configuration	Assembly	Actreg	El-O-Matic	Air Torque
80H20	30 mm x 80 mm x H20 mm	-	E 25 - E 350	AT 50 - AT 300
80H30	30 mm x 80 mm x H30 mm	A 20 - A 850	-	AT 350 - AT 500
130H30	30 mm x 130 mm x H30 mm	A 1200 - A 4000	E 600 - E 4000	-




Grey or black synthetic cable gland for non-Atex limit switches




Blue synthetic cable gland for Atex intrinsically safe limit switches (Eexi)




Cable gland in zinc steel for Atex explosion-proof limit switches (Eexd)

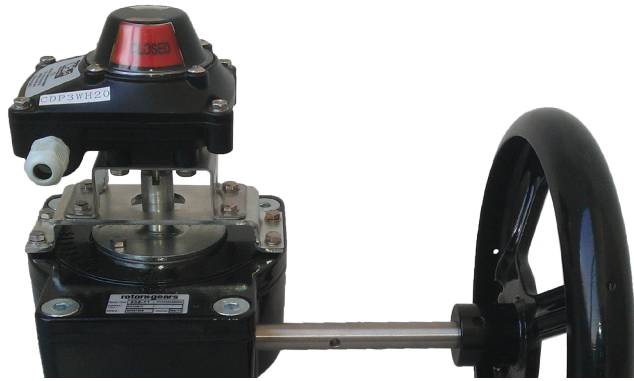

Gearbox with limit switch(es)

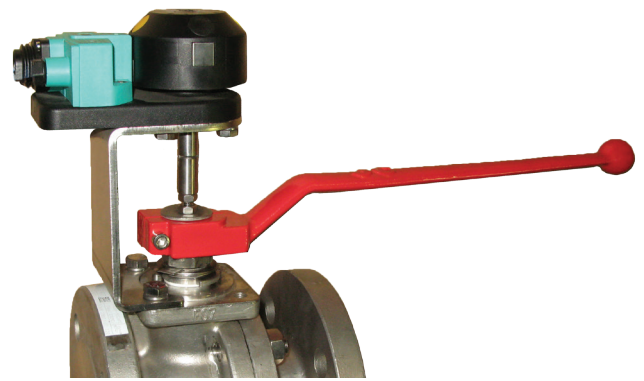

Manual valve with limit switch

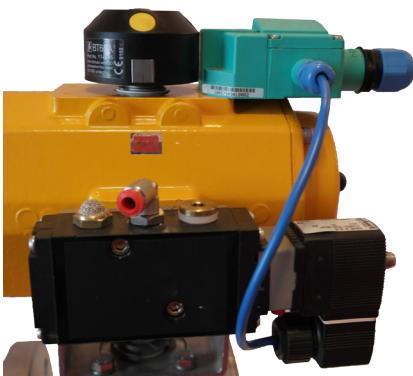

Pneumatic actuator with limit switch pre-wired solenoid



Pneumatic actuator with limit switch(es)

Other brands in our sales programme:

